






















TOWEL RAILS

2022

We offer a distinct range of high quality towel rails, each rail has been designed to be sleek and easy to install, with brackets on uprights to maximise towel space. There are four colour finishes available for all of our mild steel ranges, with Polished or Brushed options for our Stainless Steel ranges and an additional Chrome option for our Aston range. Matching valves for each finish are also available, alongside Chrome heating elements, to complete the look of the rails.

KEY


-  Selection of Finishes Available
-  Round Crossbars
-  Flat Crossbars
-  Elliptical Tube
-  Flat Tube
-  CE Approved and tested to BS EN442
-  Compatible with heating element for summer heating
-  Brackets on uprights to maximise hanging space
-  Matching Valves Available
-  Reversible Mounting
-  Vertical Ladder
-  Bars Open at One Side
-  Suitable for Open or Closed Systems
-  Available in a Brushed or Polished Finish
-  Valves Included
-  Electric Only
-  2 Year Guarantee
-  5 Year Guarantee
-  25 Year Guarantee



All prices include V.A.T.





NEW

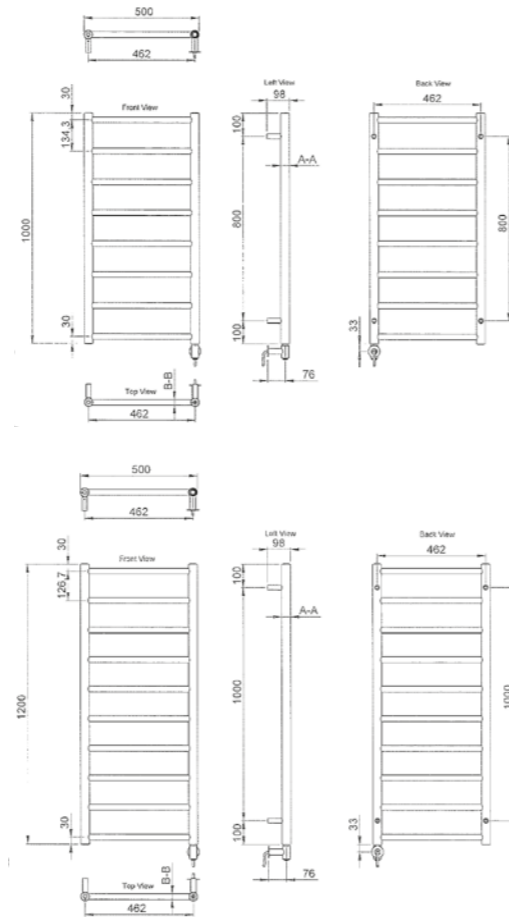


- Stainless Steel ladder rail
- Wall brackets on uprights to maximise hanging space
- Electric only with cable cover
- All finishes are PVD coated
- CE Approved and tested to IEC-60335-1

Chrome	Code	Height	Width	BTU - Δ50°C	RRP (including valves)
	<b>PL105CP</b>	1000mm	500mm	1051	<b>£702.00</b>
	<b>PL125CP</b>	1200mm	500mm	1222	<b>£894.00</b>
Brushed Nickel	Code	Height	Width	BTU - Δ50°C	RRP (including valves)
	<b>PL105BN</b>	1000mm	500mm	1051	<b>£702.00</b>
	<b>PL125BN</b>	1200mm	500mm	1222	<b>£894.00</b>
Gunmetal	Code	Height	Width	BTU - Δ50°C	RRP (including valves)
	<b>PL105GM</b>	1000mm	500mm	1051	<b>£702.00</b>
	<b>PL125GM</b>	1200mm	500mm	1222	<b>£894.00</b>
Brushed Brass	Code	Height	Width	BTU - Δ50°C	RRP (including valves)
	<b>PL105BB</b>	1000mm	500mm	1051	<b>£702.00</b>
	<b>PL125BB</b>	1200mm	500mm	1222	<b>£894.00</b>

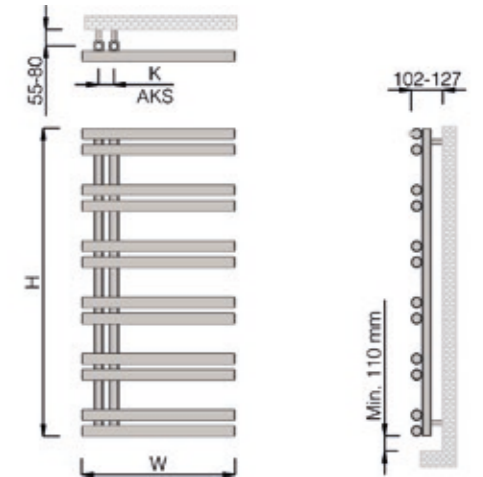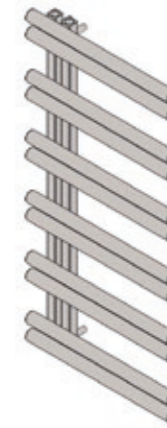

- Stainless steel ladder rail
- Wall brackets on uprights to maximise hanging space
- Suitable for use on closed or open systems
- Available in brushed, polished stainless steel or anthracite
- CE Approved and tested to BS EN442
- Includes valves

Sand	Code	Height	Width	BTU - Δ50°C	RRP (including valves)
	<b>ST105SA</b>	1000mm	500mm	1051	<b>£795</b>
	<b>ST125SA</b>	1200mm	500mm	1222	<b>£873</b>
Polished Stainless Steel	Code	Height	Width	BTU - Δ50°C	RRP (including valves)
	<b>ST105PS</b>	1000mm	500mm	1051	<b>£811</b>
	<b>ST125PS</b>	1200mm	500mm	1222	<b>£915</b>
Brushed Stainless Steel	Code	Height	Width	BTU - Δ50°C	RRP (including valves)
	<b>ST105BS</b>	1000mm	500mm	1051	<b>£681</b>
	<b>ST125BS</b>	1200mm	500mm	1222	<b>£760</b>
Anthracite	Code	Height	Width	BTU - Δ50°C	RRP (including valves)
	<b>ST105BK</b>	1000mm	500mm	1051	<b>£795</b>
	<b>ST125BK</b>	1200mm	500mm	1222	<b>£873</b>

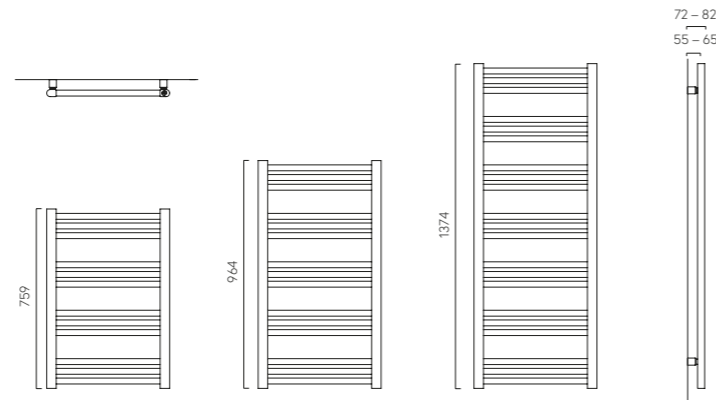

- Vertical Ladder Steel Towel Rail
- Wall brackets on uprights to maximise hanging space
- CE Approved and tested to BS EN442
- 5 Year Guarantee
- 4 Finishes – Obsidian, Gunmetal, Matt White and Smoke
- Matching Valves Available
- Compatible with heating element for summer heating

Obsidian	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>HE84OB</b>	759mm	400mm	923	150W	<b>£186</b>
	<b>HE85OB</b>	759mm	500mm	1262	150W	<b>£200</b>
	<b>HE86OB</b>	759mm	600mm	1385	400W	<b>£214</b>
	<b>HE104OB</b>	964mm	400mm	1156	400W	<b>£200</b>
	<b>HE105OB</b>	964mm	500mm	1426	400W	<b>£214</b>
	<b>HE106OB</b>	964mm	600mm	1665	400W	<b>£227</b>
	<b>HE144OB</b>	1374mm	400mm	1616	400W	<b>£255</b>
	<b>HE145OB</b>	1374mm	500mm	1976	400W	<b>£269</b>
	<b>HE146OB</b>	1374mm	600mm	2320	600W	<b>£282</b>

Gunmetal	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>HE84GN</b>	759mm	400mm	923	150W	<b>£186</b>
	<b>HE85GN</b>	759mm	500mm	1262	150W	<b>£200</b>
	<b>HE86GN</b>	759mm	600mm	1385	400W	<b>£214</b>
	<b>HE104GN</b>	964mm	400mm	1156	400W	<b>£200</b>
	<b>HE105GN</b>	964mm	500mm	1426	400W	<b>£214</b>
	<b>HE106GN</b>	964mm	600mm	1665	400W	<b>£227</b>
	<b>HE144GN</b>	1374mm	400mm	1616	400W	<b>£255</b>
	<b>HE145GN</b>	1374mm	500mm	1976	400W	<b>£269</b>
	<b>HE146GN</b>	1374mm	600mm	2320	600W	<b>£282</b>


\*Element required for dual fuel – please see page 25 for pricing







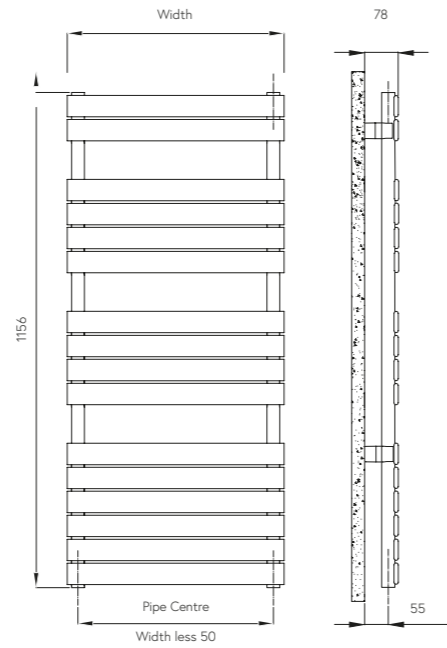

Matt White	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>HE84MW</b>	759mm	400mm	923	150W	<b>£186</b>
	<b>HE85MW</b>	759mm	500mm	1262	150W	<b>£200</b>
	<b>HE86MW</b>	759mm	600mm	1385	400W	<b>£214</b>
	<b>HE104MW</b>	964mm	400mm	1156	400W	<b>£200</b>
	<b>HE105MW</b>	964mm	500mm	1426	400W	<b>£214</b>
	<b>HE106MW</b>	964mm	600mm	1665	400W	<b>£227</b>
	<b>HE144MW</b>	1374mm	400mm	1616	400W	<b>£255</b>
	<b>HE145MW</b>	1374mm	500mm	1976	400W	<b>£269</b>
	<b>HE146MW</b>	1374mm	600mm	2320	600W	<b>£282</b>


Smoke	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>HE84SM</b>	759mm	400mm	923	150W	<b>£186</b>
	<b>HE85SM</b>	759mm	500mm	1262	150W	<b>£200</b>
	<b>HE86SM</b>	759mm	600mm	1385	400W	<b>£214</b>
	<b>HE104SM</b>	964mm	400mm	1156	400W	<b>£200</b>
	<b>HE105SM</b>	964mm	500mm	1426	400W	<b>£214</b>
	<b>HE106SM</b>	964mm	600mm	1665	400W	<b>£227</b>
	<b>HE144SM</b>	1374mm	400mm	1616	400W	<b>£255</b>
	<b>HE145SM</b>	1374mm	500mm	1976	400W	<b>£269</b>
	<b>HE146SM</b>	1374mm	600mm	2320	600W	<b>£282</b>

\*Element required for dual fuel – please see page 25 for pricing




-  Flat Tube Steel Towel Rail – 10mm x 50mm
-  Wall brackets on uprights to maximise hanging space
-  CE Approved and tested to BS EN442
-  5 Year Guarantee
-  4 Finishes – Obsidian, Gunmetal, Matt White and Smoke
-  Matching Valves Available
-  Compatible with heating element for summer heating

Obsidian	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>HN115OB</b>	1156mm	506mm	1904	400W	<b>£413</b>
	<b>HN116OB</b>	1156mm	606mm	2245	600W	<b>£448</b>


Gunmetal	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>HN115GN</b>	1156mm	506mm	1904	400W	<b>£413</b>
	<b>HN116GN</b>	1156mm	606mm	2245	600W	<b>£448</b>

Matt White	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>HN115MW</b>	1156mm	506mm	1904	400W	<b>£413</b>
	<b>HN116MW</b>	1156mm	606mm	2245	600W	<b>£448</b>

Smoke	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>HN115SM</b>	1156mm	506mm	1904	400W	<b>£413</b>
	<b>HN116SM</b>	1156mm	606mm	2245	600W	<b>£448</b>

\*Element required for dual fuel – please see page 25 for pricing


# HUNSDON SIDE

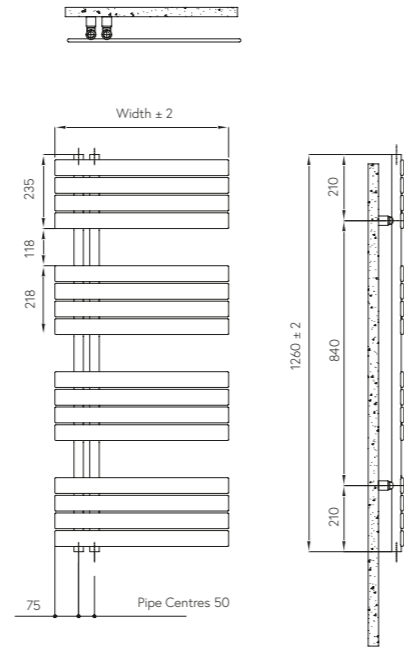

# HUNSDON SIDE




-  Flat tube steel open sided towel rail – 10mm x 50mm
-  5 Year Guarantee
-  Bars open on one side to ensure easy towel hanging
-  4 Finishes – Obsidian, Gunmetal, Matt White and Smoke
-  Reversible to allow opening on either side
-  Matching Valves Available
-  CE Approved and tested to BS EN442
-  Compatible with heating element for summer heating

Obsidian	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>HNS125OB</b>	1260mm	550mm	1866	400W	<b>£448</b>
	<b>HNS127OB</b>	1260mm	700mm	2201	600W	<b>£482</b>


Gunmetal	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>HNS125GN</b>	1260mm	550mm	1866	400W	<b>£448</b>
	<b>HNS127GN</b>	1260mm	700mm	2201	600W	<b>£482</b>








Matt White	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>HNS125MW</b>	1260mm	550mm	1866	400W	<b>£448</b>
	<b>HNS127MW</b>	1260mm	700mm	2201	600W	<b>£482</b>

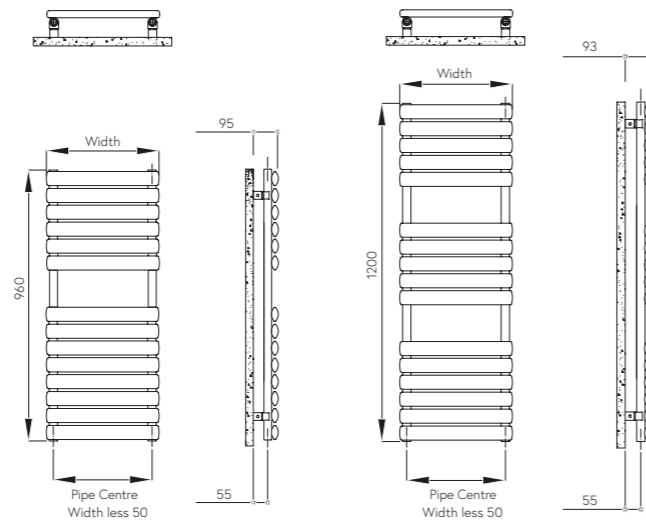Smoke	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>HNS125SM</b>	1260mm	550mm	1866	400W	<b>£448</b>
	<b>HNS127SM</b>	1260mm	700mm	2201	600W	<b>£482</b>


\*Element required for dual fuel – please see page 25 for pricing

# BAYFORD



-  Elliptical tube steel towel rail
-  Wall brackets on uprights to maximise hanging space
-  CE Approved and tested to BS EN442
-  5 Year Guarantee
-  4 Finishes – Obsidian, Gunmetal, Matt White and Smoke
-  Matching Valves Available
-  Compatible with heating element for summer heating

Obsidian	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>BY105OB</b>	960mm	500mm	1761	400W	<b>£440</b>
	<b>BY106OB</b>	960mm	600mm	2051	600W	<b>£468</b>
	<b>BY125OB</b>	1200mm	500mm	1965	400W	<b>£523</b>
	<b>BY126OB</b>	1200mm	600mm	2180	600W	<b>£551</b>

Gunmetal	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>BY105GN</b>	960mm	500mm	1761	400W	<b>£440</b>
	<b>BY106GN</b>	960mm	600mm	2051	600W	<b>£468</b>
	<b>BY125GN</b>	1200mm	500mm	1965	400W	<b>£523</b>
	<b>BY126GN</b>	1200mm	600mm	2180	600W	<b>£551</b>


Matt White	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>BY105MW</b>	960mm	500mm	1761	400W	<b>£440</b>
	<b>BY106MW</b>	960mm	600mm	2051	600W	<b>£468</b>
	<b>BY125MW</b>	1200mm	500mm	1965	400W	<b>£523</b>
	<b>BY126MW</b>	1200mm	600mm	2180	600W	<b>£551</b>







Smoke	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>BY105SM</b>	960mm	500mm	1761	400W	<b>£440</b>
	<b>BY106SM</b>	960mm	600mm	2051	600W	<b>£468</b>
	<b>BY125SM</b>	1200mm	500mm	1965	400W	<b>£523</b>
	<b>BY126SM</b>	1200mm	600mm	2180	600W	<b>£551</b>

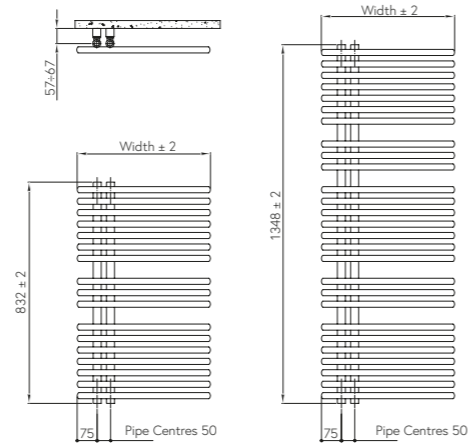
\*Element required for dual fuel – please see page 25 for pricing


# BAYFORD







-  Round tube steel open sided towel rail
-  Bars open on one side to ensure easy towel hanging
-  Reversible to allow opening on either side
-  CE Approved and tested to BS EN442
-  5 Year Guarantee
-  4 Finishes – Obsidian, Gunmetal, Matt White and Smoke
-  Matching Valves Available
-  Compatible with heating element for summer heating

Obsidian	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>WA85OB</b>	832mm	500mm	1273	150W	<b>£413</b>
	<b>WA86OB</b>	832mm	600mm	1512	400W	<b>£440</b>
	<b>WA135OB</b>	1348mm	500mm	2023	400W	<b>£551</b>
	<b>WA136OB</b>	1348mm	600mm	2365	600W	<b>£578</b>

Gunmetal	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>WA85GN</b>	832mm	500mm	1273	150W	<b>£413</b>
	<b>WA86GN</b>	832mm	600mm	1512	400W	<b>£440</b>
	<b>WA135GN</b>	1348mm	500mm	2023	400W	<b>£551</b>
	<b>WA136GN</b>	1348mm	600mm	2365	600W	<b>£578</b>

Matt White	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>WA85MW</b>	832mm	500mm	1273	150W	<b>£413</b>
	<b>WA86MW</b>	832mm	600mm	1512	400W	<b>£440</b>
	<b>WA135MW</b>	1348mm	500mm	2023	400W	<b>£551</b>
	<b>WA136MW</b>	1348mm	600mm	2365	600W	


Smoke	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>WA85SM</b>	832mm	500mm	1273	150W	<b>£413</b>
	<b>WA86SM</b>	832mm	600mm	1512	400W	<b>£440</b>
	<b>WA135SM</b>	1348mm	500mm	2023	400W	<b>£551</b>
	<b>WA136SM</b>	1348mm	600mm	2365	600W	<b>£578</b>

\*Element required for dual fuel – please see page 25 for pricing





# BRAMFIELD

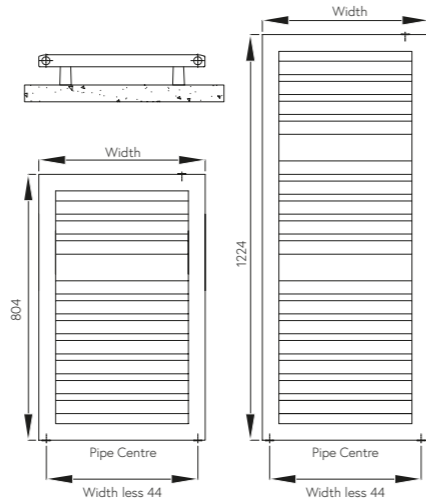

- Elliptical tube steel towel rail
- Wall brackets on crossbar to allow rail to be reversible to shower either flat or curved side
- CE Approved and tested to BS EN442
- 5 Year Guarantee
- 4 finishes – Obsidian, Gunmetal, Matt white & Smoke
- Matching valves available
- Compatible with heading element for summer heating


Obsidian	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>BR85OB</b>	804mm	500mm	1396	400W	<b>£304</b>
	<b>BR86OB</b>	804mm	600mm	1634	400W	<b>£331</b>
	<b>BR125OB</b>	1224mm	500mm	2061	600W	<b>£385</b>
	<b>BR126OB</b>	1224mm	600mm	2423	600W	<b>£413</b>
Gunmetal	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>BR85GN</b>	804mm	500mm	1396	400W	<b>£304</b>
	<b>BR86GN</b>	804mm	600mm	1634	400W	<b>£331</b>
	<b>BR125GN</b>	1224mm	500mm	2061	600W	<b>£385</b>
	<b>BR126GN</b>	1224mm	600mm	2423	600W	<b>£413</b>
Matt White	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>BR85MW</b>	804mm	500mm	1396	400W	<b>£304</b>
	<b>BR86MW</b>	804mm	600mm	1634	400W	<b>£331</b>
	<b>BR125MW</b>	1224mm	500mm	2061	600W	<b>£385</b>
	<b>BR126MW</b>	1224mm	600mm	2423	600W	<b>£413</b>
Smoke	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>BR85SM</b>	804mm	500mm	1396	400W	<b>£304</b>
	<b>BR86SM</b>	804mm	600mm	1634	400W	<b>£331</b>
	<b>BR125SM</b>	1224mm	500mm	2061	600W	<b>£385</b>
	<b>BR126SM</b>	1224mm	600mm	2423	600W	<b>£413</b>

\*Element required for dual fuel – please see page 25 for pricing

BRAMFIELD



# ASTON

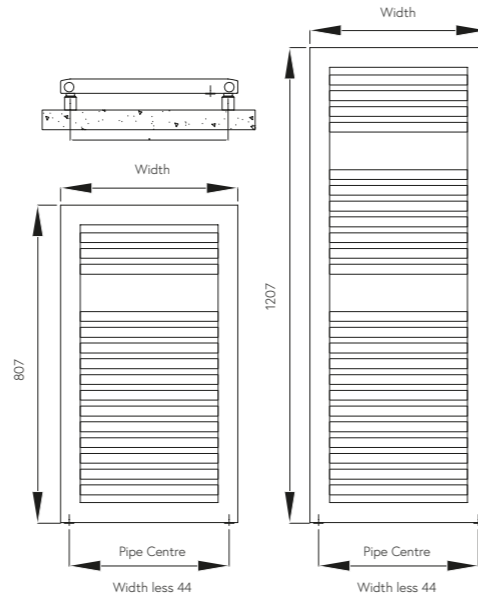

- Framed steel towel rail with round crossbars
- Wall brackets on uprights to maximise hanging space
- CE Approved and tested to BS EN442
- 5 Year Guarantee
- 5 finishes – Chrome, Obsidian, Gunmetal, Matt White & Smoke
- Matching Valves Available
- Compatible with heating element for summer heating

Chrome	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>AS85CP</b>	807mm	500mm	1027	400W	<b>£681</b>
	<b>AS86CP</b>	807mm	600mm	1211	400W	<b>£722</b>
	<b>AS125CP</b>	1207mm	500mm	1456	600W	<b>£770</b>
	<b>AS126CP</b>	1207mm	600mm	1716	600W	<b>£859</b>

Gunmetal	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>AS85GN</b>	807mm	500mm	1467	400W	<b>£276</b>
	<b>AS86GN</b>	807mm	600mm	1730	400W	<b>£304</b>
	<b>AS125GN</b>	1207mm	500mm	2081	600W	<b>£310</b>
	<b>AS126GN</b>	1207mm	600mm	2450	600W	<b>£338</b>

Matt White	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>AS85MW</b>	807mm	500mm	1467	400W	<b>£276</b>
	<b>AS86MW</b>	807mm	600mm	1730	400W	<b>£304</b>
	<b>AS125MW</b>	1207mm	500mm	2081	600W	<b>£310</b>
	<b>AS126MW</b>	1207mm	600mm	2450	600W	<b>£338</b>

Smoke	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>AS85SM</b>	807mm	500mm	1467	400W	<b>£276</b>
	<b>AS86SM</b>	807mm	600mm	1730	400W	<b>£304</b>
	<b>AS125SM</b>	1207mm	500mm	2081	600W	<b>£310</b>
	<b>AS126SM</b>	1207mm	600mm	2450	600W	<b>£338</b>



\*Element required for dual fuel – please see page 25 for pricing








# ASTON

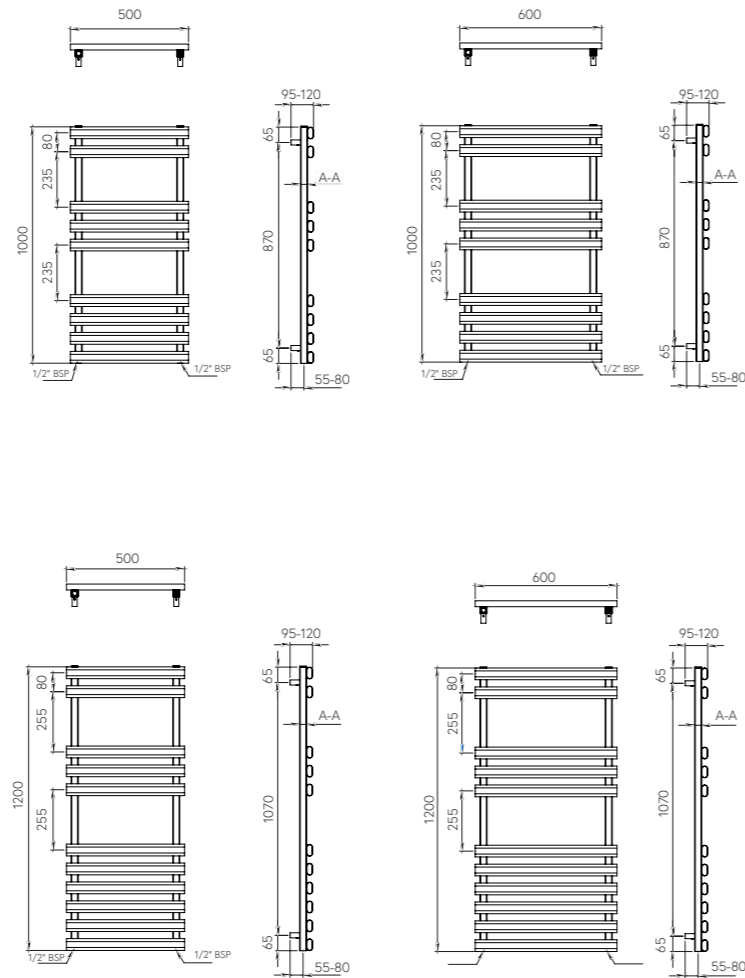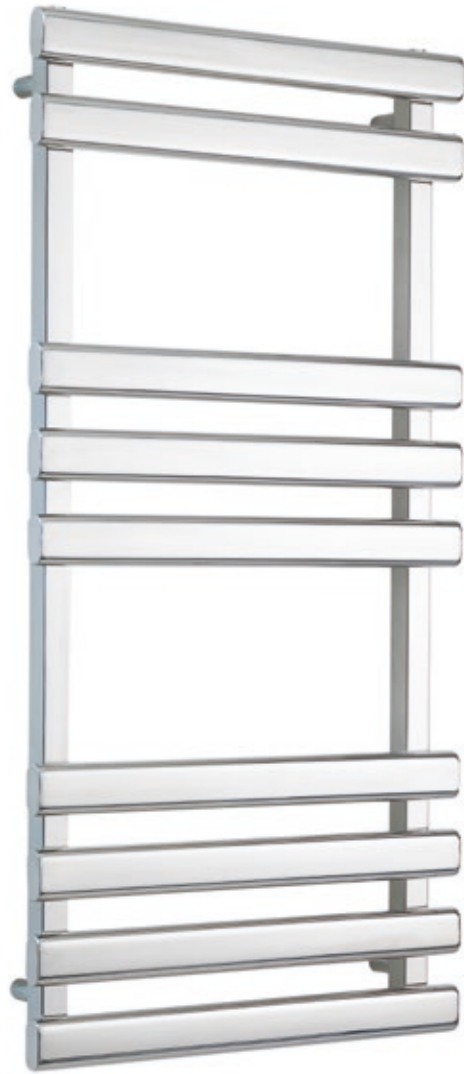

Obsidian	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>AS85OB</b>	807mm	500mm	1467	400W	<b>£276</b>
	<b>AS86OB</b>	807mm	600mm	1730	400W	<b>£304</b>
	<b>AS125OB</b>	1207mm	500mm	2081	600W	<b>£310</b>
	<b>AS126OB</b>	1207mm	600mm	2450	600W	<b>£338</b>

\*Element required for dual fuel – please see page 25 for pricing



-  Polished stainless steel towel rail with elliptical crossbars
-  Wall brackets on uprights to maximise hanging space
-  Suitable for use on closed or open systems
-  CE Approved and tested to BS EN442
-  25 Year Guarantee
-  Matching Valves available
-  Compatible with heating element for summer heating

Polished  
Stainless  
Steel




Code	Height	Width	BTU - $\Delta 50^{\circ}\text{C}$	Element Required*	RRP
<b>AM105PS</b>	1000mm	500mm	1102	150W	<b>£718</b>
<b>AM106PS</b>	1000mm	600mm	1259	150W	<b>£784</b>
<b>AM125PS</b>	1200mm	500mm	1320	150W	<b>£857</b>
<b>AM126PS</b>	1200mm	600mm	1491	400W	<b>£936</b>

\*Element required for dual fuel – please see page 25 for pricing




# SPIN

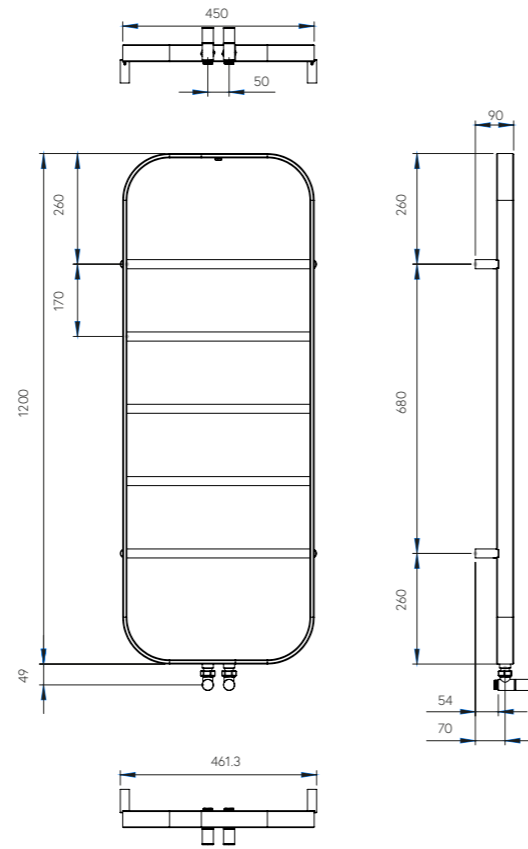

-  Stainless Steel Ladder rail
-  Wall brackets on uprights to maximise hanging space
-  Suitable for use on closed or open systems
-  25 Year Guarantee
-  Available in brushed, polished stainless steel or anthracite
-  CE Approved and tested to BS EN442
-  Includes Valves

Sand	Code	Height	Width	BTU - $\Delta 50^{\circ}\text{C}$	RRP (including valves)
	<b>SP1245SA</b>	1200mm	450mm	610	<b>£714</b>


Polished Stainless Steel	Code	Height	Width	BTU - $\Delta 50^{\circ}\text{C}$	RRP (including valves)
	<b>SP1245PS</b>	1200mm	450mm	610	<b>£760</b>

Brushed Stainless Steel	Code	Height	Width	BTU - $\Delta 50^{\circ}\text{C}$	RRP (including valves)
	<b>SP1245BS</b>	1200mm	450mm	720	<b>£616</b>

Anthracite	Code	Height	Width	BTU - $\Delta 50^{\circ}\text{C}$	RRP (including valves)
	<b>SP1245BK</b>	1200mm	450mm	758	<b>£760</b>



# WIDFORD

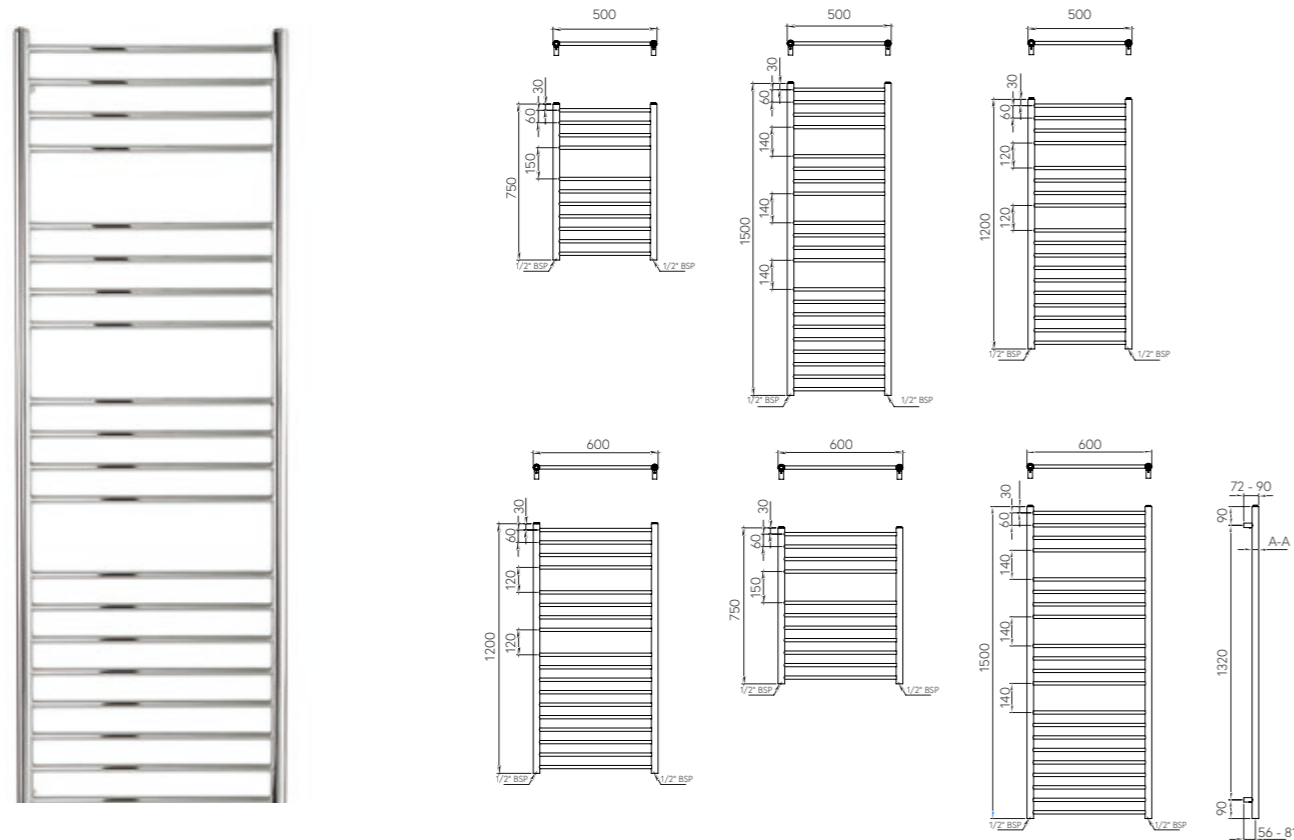


- Stainless Steel Ladder rail
- Wall brackets on uprights to maximise hanging space
- Suitable for use on closed or open systems
- 25** 25 Year Guarantee
- Available in brushed or polished stainless steel
- CE Approved and tested to BS EN442
- Compatible with heating element for summer heating

Polished Stainless Steel	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>WD75PS</b>	750mm	500mm	648	150W	<b>£370</b>
	<b>WD76PS</b>	750mm	600mm	734	150W	<b>£387</b>
	<b>WD125PS</b>	1200mm	500mm	1020	150W	<b>£485</b>
	<b>WD126PS</b>	1200mm	600mm	1160	150W	<b>£534</b>
	<b>WD155PS</b>	1500mm	500mm	1262	150W	<b>£741</b>
	<b>WD156PS</b>	1500mm	600mm	1443	400W	<b>£810</b>

Brushed Stainless Steel	Code	Height	Width	BTU - Δ50°C	Element Required*	RRP
	<b>WD75BS</b>	750mm	500mm	648	150W	<b>£357</b>
	<b>WD76BS</b>	750mm	600mm	734	150W	<b>£374</b>
	<b>WD125BS</b>	1200mm	500mm	1020	150W	<b>£466</b>
	<b>WD126BS</b>	1200mm	600mm	1160	150W	<b>£520</b>
	<b>WD155BS</b>	1500mm	500mm	1262	150W	<b>£714</b>
	<b>WD156BS</b>	1500mm	600mm	1443	400W	<b>£741</b>

# WIDFORD ELECTRIC

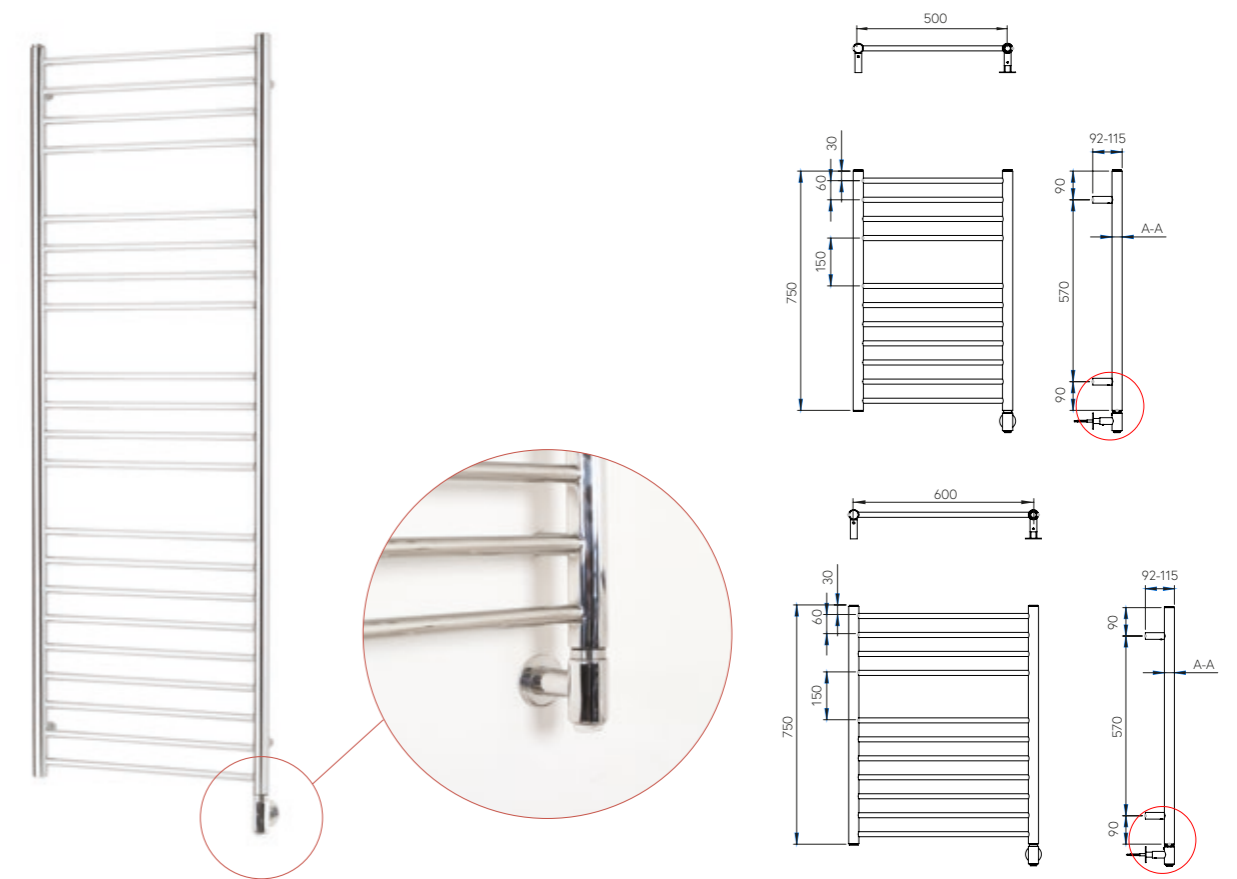

- Stainless Steel Ladder rail
- Wall brackets on uprights to maximise hanging space
- Electric only with cable cover
- 25** 25 Year Guarantee
- Available in brushed or polished stainless steel
- CE Approved and tested to IEC-60335-1

Polished Stainless Steel	Code	Height	Width	BTU - Δ50°C	RRP
	<b>WDE75PS</b>	750mm	500mm	648	<b>£481</b>
	<b>WDE76PS</b>	750mm	600mm	734	<b>£497</b>
	<b>WDE125PS</b>	1200mm	500mm	1020	<b>£602</b>
	<b>WDE126PS</b>	1200mm	600mm	1160	<b>£644</b>
	<b>WDE155PS</b>	1500mm	500mm	1262	<b>£852</b>
	<b>WDE156PS</b>	1500mm	600mm	1443	<b>£921</b>

Brushed Stainless Steel	Code	Height	Width	BTU - Δ50°C	RRP
	<b>WDE75BS</b>	750mm	500mm	648	<b>£467</b>
	<b>WDE76BS</b>	750mm	600mm	734	<b>£483</b>
	<b>WDE125BS</b>	1200mm	500mm	1020	<b>£583</b>
	<b>WDE126BS</b>	1200mm	600mm	1160	<b>£630</b>
	<b>WDE155BS</b>	1500mm	500mm	1262	<b>£824</b>
	<b>WDE156BS</b>	1500mm	600mm	1443	<b>£852</b>

## VALVES

### Standard Angled



Code	Finish	RRP
DIFVALNCPP	Chrome	£49

### Standard Straight



Code	Finish	RRP
DIFVALSTCP	Chrome	£49

### Premium Angled



Code	Finish	RRP
DIFPVALNCPP	Chrome	£83
DIFPVALANMW	Matt White	£119
DIFPVALANSM	Smoke	£119
DIFPVALANOB	Obsidian	£119
DIFPVALANGN	Gunmetal	£119

### Premium Straight




Code	Finish	RRP
DIFPVALSTCP	Chrome	£83
DIFPVALSTMW	Matt White	£119
DIFPVALSTSM	Smoke	£119
DIFPVALSTOB	Obsidian	£119
DIFPVALANGN	Gunmetal	£119

### Premium Corner



Code	Finish	RRP
DIFPVALCRCP	Chrome	£119
DIFPVALCRMW	Matt White	£179
DIFPVALCRSM	Smoke	£179
DIFPVALCROB	Obsidian	£179
DIFPVALCRGN	Gunmetal	£179

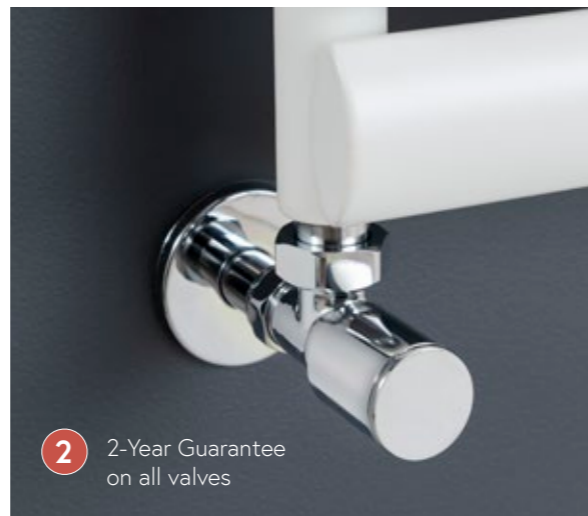

**2** 2-Year Guarantee on all valves

Obsidian ● Gunmetal ● Matt White ○ Smoke ● Chrome ○

## HEATING ELEMENTS

All hydronic Diffusion rails can be made Dual Fuel (with the exception of Spin) which is an easy way to warm your towels when the central heating system is off during the summer. When using the rail as Dual Fuel, a T-piece must be added.

### Premium w/Chrome cover & Wall Plate



### T-Piece



**2** 2-Year Guarantee on all Heating Elements

Code	Power	RRP
DIFE150CP	150W	£138
DIFE400CP	400W	£174
DIFE600CP	600W	£216
DIFT	T-piece - 50 mm	£15

Each rail needs a specific size element in order to maintain the correct heat – please see individual rail pages for more information.



## Terms & Conditions

### 1. Guarantees

- (i) We offer a 5 year Guarantee on Steel heated towel rails, 25 year Guarantee on Stainless steel heated towel rails & 2 years on electric elements from date of delivery which is non-transferable.
- (ii) The guarantees are subject to the Products being installed by a qualified installer and in accordance with British and or European standards as well as directed by the manufacturer in their installation instructions and covers all manufacturing defects caused by faulty materials or workmanship.
- (iii) The guarantees in all cases are restricted to the free of charge replacement or repair of the failed product only.

### 2. Leaking Radiators

- (i) If any of the Products leak after installation or are otherwise faulty during the relevant warranty period (see Guarantees), please notify us within 7 days of the date on which you discover the fault.
- (ii) We will, at our discretion, either replace or repair the Products. If we replace a Product we will deliver a replacement Product and collect the damaged Product from you within 14 days of delivering the replacement. These Terms will apply to any repaired or replacement Product we supply to you. If we comply with this term we shall have no further liability in respect of the faulty Product.
- (iii) We will charge you for any replacement Products should the faulty Product not be returned to us within 14 of delivery of the replacement. All returned items should be suitably packaged to prevent any further damage.

### 3. Technical

- (i) Towel rails with steel components (other than stainless steel) MUST NOT be installed on a domestic hot water circuit.
- (ii) Radiators should not be located in areas that have long term exposure to high levels of moisture & Suitable ventilation should be installed in these areas.
- (iii) Towel rails and Radiators are not designed for drying wet or sodden items. They are suitable for airing and preparation of warm towels only.
- (iv) In addition, due to the excessively corrosive nature of chlorine we do not recommend that radiators & towel rails are placed in swimming pool environments.
- (v) Artificially softened water should not be used to fill towel rails.

### 4. Paint Finishes

- (i) Please note, due to printing processes, colours in our printed material may not be representative of the true finished colour and appropriate colour samples should be used before selecting a colour.
- (ii) It should be noted that due to the production process finished colours can vary by +/- 5-10% from samples or colour charts provided and between towel rails ordered in the same colour at different times.

### 5. Adjusting Pipe Work Prior to Delivery

- (i) We endeavour to ensure all pipe centre dimensions are correct, manufacturing tolerances must be considered. Therefore, we strongly recommend that pipe work is not altered or adjusted until the new towel rail is fixed in its final position.
- (ii) We will not accept any responsibility for any claims relating to inaccurate pipe centre information.

### 6. Commissioning

- (i) In accordance with Part L1 2006 of The Building Regulations and BS7593:1992 code of practice for the treatment of hot water and central heating systems, we strongly recommend systems are suitably flushed to remove debris post installation of any new towel rail(s) on a system and that a suitable quality and quantity of inhibitor is used to protect against scale, corrosion and bacterial growth in all types of indirect central heating systems.
- (ii) Failure to follow Part L1 2006 properly to protect a heating system will almost certainly lead to internal corrosion of radiators (or other products supplied) and will also almost certainly invalidate our product warranties.
- (iii) We reserve the right to request and undertake a relevant water test to check the quality of a heating system; details of all reports will be provided.

Standard Terms & Conditions apply, these are available on request.

Due to a policy of continuous improvement, we reserve the right to change specification and prices without prior notice.

Prices Include V.A.T.

E & O.E.



2

Year  
Guarantee

All electric elements and radiator valves have a no-quibble 2-year guarantee for replacement or repair.

5

Year  
Guarantee

All mild steel towel warmers carry a 5-year guarantee for finish, manufacturing defects subject to the correct installation and following our guidance in our terms and conditions.

25

Year  
Guarantee

All stainless steel towel warmers carry a 25-year guarantee for repair or replacement.



01992 441672

[sales@diffusionuk.co.uk](mailto:sales@diffusionuk.co.uk)

JULY 2022